


Introduction:

KL4004 is constant angle and constant torque micro stepper drives. This type supplies regulated phase current for supplies voltages between 24-40V. It is designed for the 2-phase hybrid step motor of all kinds with 42-86mm outside diameter, 6 or 8 lead and 4A current max. It is widely used in small numerical control equipment with high resolution such as carving machine, laser labeling, laser inner carving machine etc.


Features:

- High reliability
- 12/8 channels constant angle and constant torque micro step, highest micro steps: 200
- Unique control circuitry
- Highest response frequency: 200Kpps
- Winding current will be reduced by 50% when no step pulse command is received for 0.1 second.
- Bipolar constant current chopping mode
- Optically isolated signals I/O
- Driving current is continually adjustable from 0.5A/phase to 4A/phase
- Single power supply (24-40Vdc)


FUNCTION DIP SWITCHES:

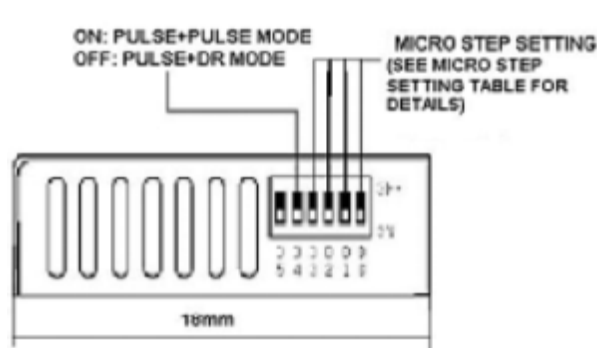

Input signal timing

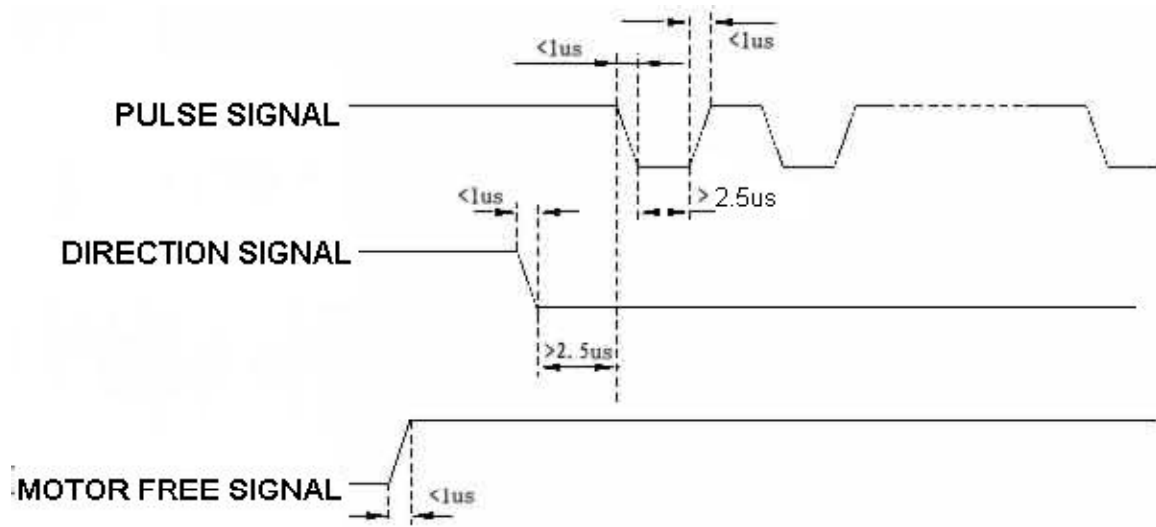

FUNCTIONAL DESCRIPTION:

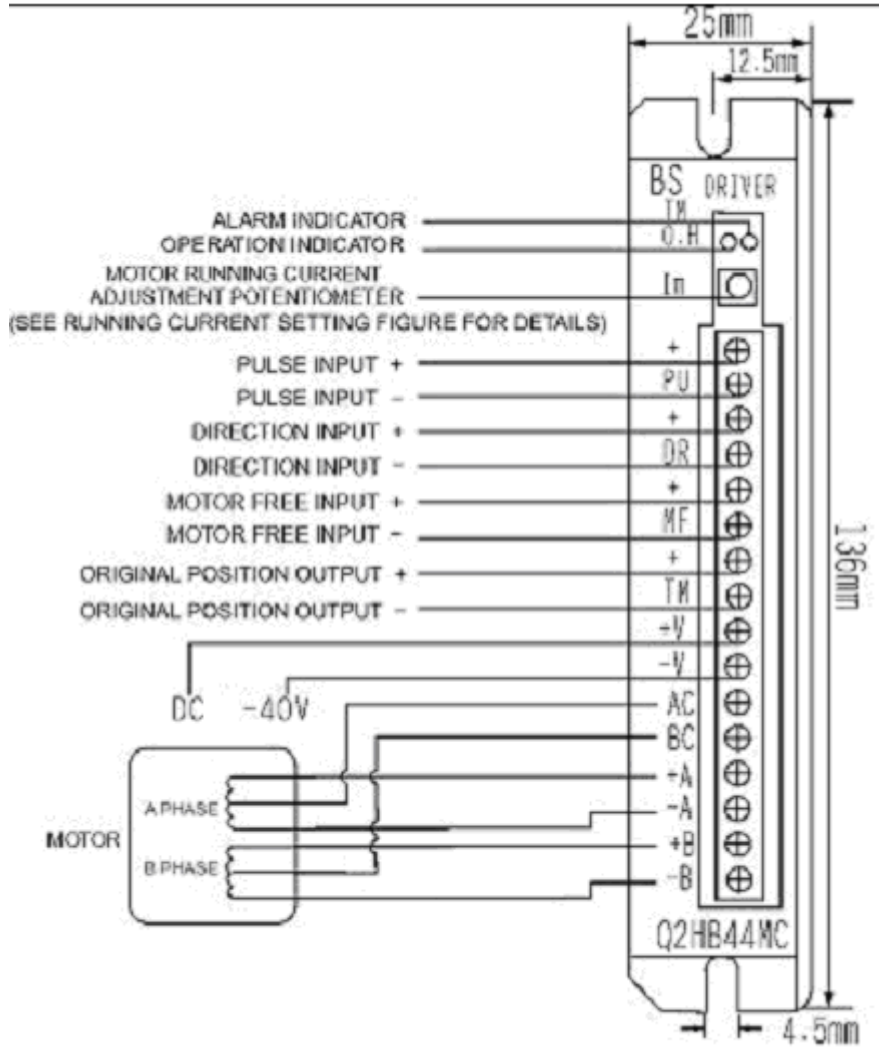

Note

1. Do not connect the power reversal, the input voltage should not over 40Vdc.
2. The voltage of the input control signal is 5V, a series resistance is necessary to limit the current when the voltage level is over 5V.
3. When the temperature of drive is over 70C, the overheat indicator will light, then the driver will stop working until the temperature falls down to 50C. A radiator is needed then the overheat protection occurs
4. Because this type driver adopts special control circuit, the motor must be 6 or 8 lead motor.

Micro step setting table

Micro step	1	2	4	5	8	10	20	25	40	50	100	200	200	200	200
D0	ON	OFF	ON	OFF	ON	OFF	ON	OFF	ON	OFF	ON	OFF	ON	OFF	ON
D1	ON	ON	OFF	OFF	ON	ON	OFF	OFF	ON	ON	OFF	OFF	ON	ON	OFF
D2	ON	ON	ON	ON	OFF	OFF	OFF	OFF	ON	ON	ON	ON	OFF	OFF	OFF
D3	ON	ON	ON	ON	ON	ON	ON	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF
D4	ON=Two-Pulse Mode : PU=CW Mode ; DR=CCW Mode OFF=One-Pulse Mode : PU=Pulse ; DR=Direction														

Micro step setting table

Micro step	1	2	4	8	16	32	64	128
D0	ON	OFF	ON	OFF	ON	OFF	ON	OFF
D1	ON	ON	OFF	OFF	ON	ON	OFF	OFF
D2	ON	ON	ON	ON	OFF	OFF	OFF	OFF
D3	NO USE							
D4	ON=Two-Pulse Mode: PU=CW Mode; DR=CCW Mode OFF=One-Pulse Mode: PU=Pulse; DR=Direction							

Mark Symbol	Function	Note
TM	Running indicator light	When the TM is enabled, the green LED will light
O.H	Failure indicator light	The red LED will light when overheat protection effects
Im	Potentiometer for setting the winding	Adjust the motor's phase current. Decrease with the CCW rotation, increase with the CW

	current	rotation.
	+ Anode of optical isolated inputs	Connected to +5V power. Driven voltage: +5V~+24V, an R is needed when the voltage is over +5V, please refer to page 5 input signals for detail.
	PU D4=OFF, PU: step pulse	Each negative pulse edge triggers one motor step. Input resistance is 220 Ω . Requiring low voltage level: 0~0.5V, high voltage level: 4~5V, pulse width>2.5us.
D4=ON, PU: CW step pulse		
	+ Anode of optical isolated inputs	Connected to +5V power. Driven voltage: +5V~+24V, an R is needed when the voltage is over +5V, please refer to page 4 input signals for detail.
	DR D4=OFF, DR: set pulse	Used to change the motor's running direction. Input resistance is 430 Ω . Requiring low voltage level: 0~0.5V, high voltage level: 4~5V, pulse width>2.5us.
D4=ON, DR: CW set pulse		
	+ Anode of optical isolated inputs	Connected to +5V power. Driven voltage: +5V~+24V, an R is needed when the voltage is over +5V, please refer to page 5 input signals for detail.
	MF Motor free signal	The current of the winding is cut off. The driver stops working, the motor is in a free status.
	+ Anode of origin's optical isolated output	Enabled when the energized motor's winding are on the origin (B, -A energized); optical isolated outputs (high voltage level).
	TM Cathode of origin's optical isolated output	Connected + to the resistance to limited the current of output signals. TM to the ground of outputs maximum driving current 50mA, highest voltage 50V.
	+V Anode of power	DC24~40V
	-V Anode of cathode	
	AC, BC Motor's connection	
		+A, -A
		+B, -B