


# Hybrid Stepper Motor

KL 23H 256-30-4B

Rev: 1.0  
Date: 20141007

UNIT=mm

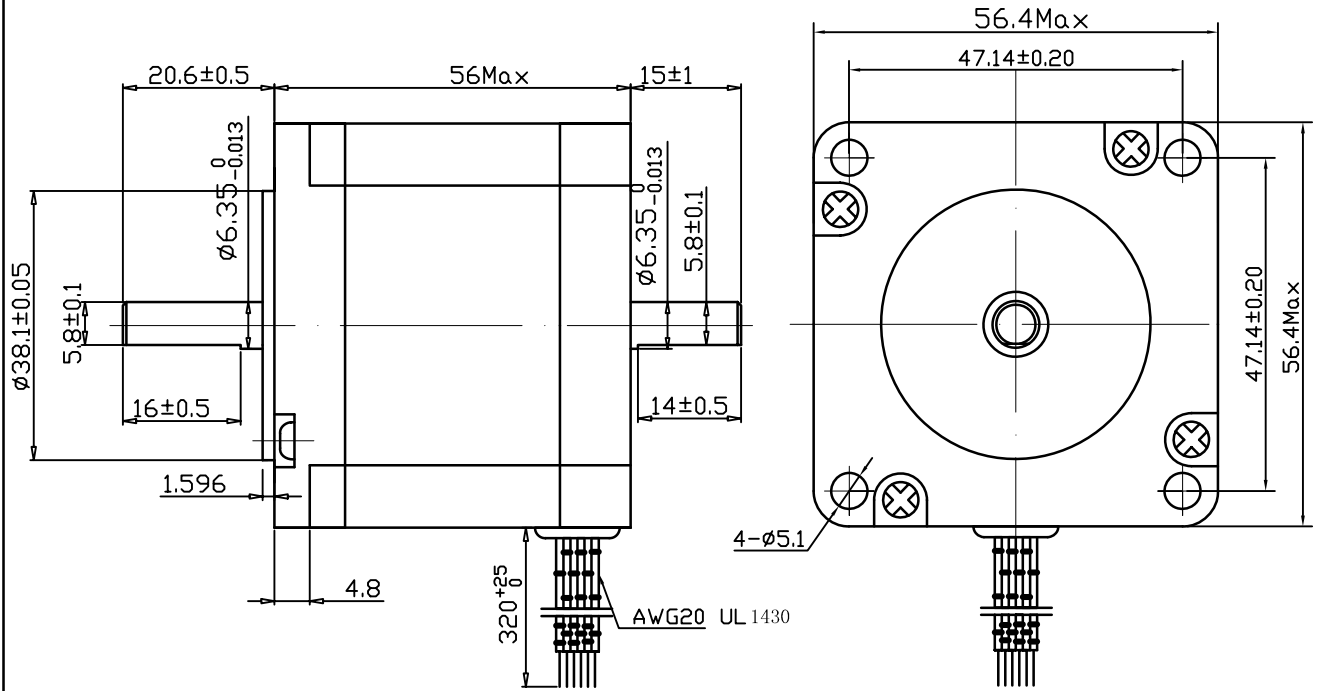

**COMMON RATINGS**

Temperature rise: 80°C

Insulating class: B

Radial play: 0.025mm max. (load 450g)

Dielectric strength: 500VDC

Insulation resistance: 100MΩ(500VDC)

MODEL	PHASES	STEP ANGLE	RATED VOLTAGE	CURRENT /PHASE	RESISTANCE /PHASE	INDUCTANCE /PHASE	HOLDING TORQUE	ROTOR INERTIA	WEIGHT
		DEC /STEP	V	A	Ω (20°C)	mH±20%	N.CM	g.cm	Kg
	2	1.8	1.95	3.0	0.65	2.4	130	xxx	0.65

