

Hybrid Stepping Motor

Type: 17H51-1308

Rev: A

Date: 20060214

COMMON RATINGS

Step angle: 1.8°

Dielectric strength: 500VDC

Positional accuracy: ±5%

Insulation resistance: 100Mohm (500VDC)

Number of Phase: 4

Radial play:

Temperature rise: 80° C MAX

Insulating class: B

Inertia: gcm²



Weight: kg

SPECIFICATIONS

Holding torque (2 phases on) kg. cm	Rated Current/Phase (Amps DC)	Phase Resistance (ohms) ± 10%	Voltage Current/Phase (V DC)	Phase Inductance (mH) ± 20% (1KHz) Typicat
6.0	1.3	5.6	7.28	7

DIMENSIONS unit=mm

CONNECTIONS

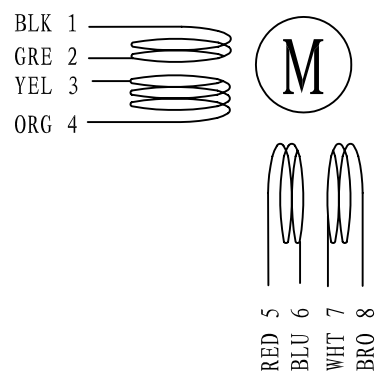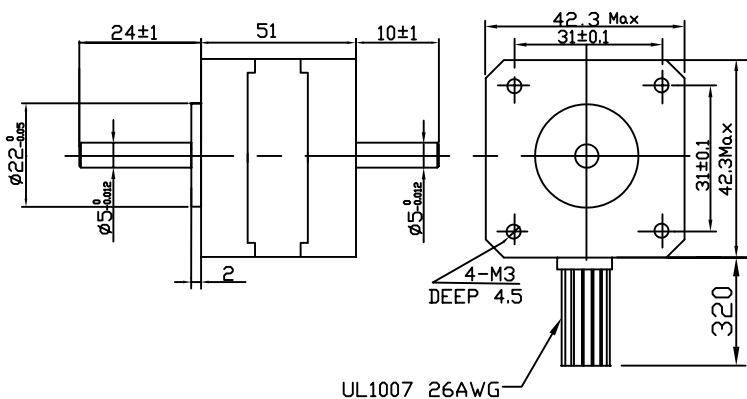

						17H51-1308			技术规格书		
标记	处数	分区	更改文件号	签名	日期						
设计			标准化			阶段	标记	重量	比例		
审核											
工艺			批准			共 张		第 张		Keling Technology, Inc	