


# Specifications:

MODEL	PHASE	STEP ANGLE	RATED VOLTAGE	CURRENT /PHASE	RESISTANCE /PHASE	INDUCTANCE /PHASE	HOLDING TORQUE	ROTOR INERTIA	WEIGHT
		DEG /STEP	V	A	$\Omega$	mH	N. m	$g \cdot cm^2$	Kg
Unipolar	4	1.8	6.0	2.0	3.0	6.8	2.15	840	1.4
Bipolar(P)	2		4.17	2.8	1.5	6.8	3		
Bipolar(S)	2		8.4	1.4	6.0	27.2	3		

## Wiring Diagram:

A:BLU/WHT  
 $\bar{A}$ :BLU  
 $\bar{C}$ :RED/WHT  
 $\bar{C}$ :RED  
B:GRN/WHT  
 $\bar{B}$ :GRN  
 $\bar{D}$ :BLK/WHT  
D:BLK




\*start of the coil

## FULL STEP, PARALLEL BIPOLAR

CW DIRECTION	STEP	blu/wht red/wht A	blu red C	grn/wht blk/wht B	grn blk D
↓	1	+		+	
	2		+	+	
	3		+		+
	4	+			+
	1	+		+	

CW, VIEW FROM FLANGE SIDE

## Dimension:

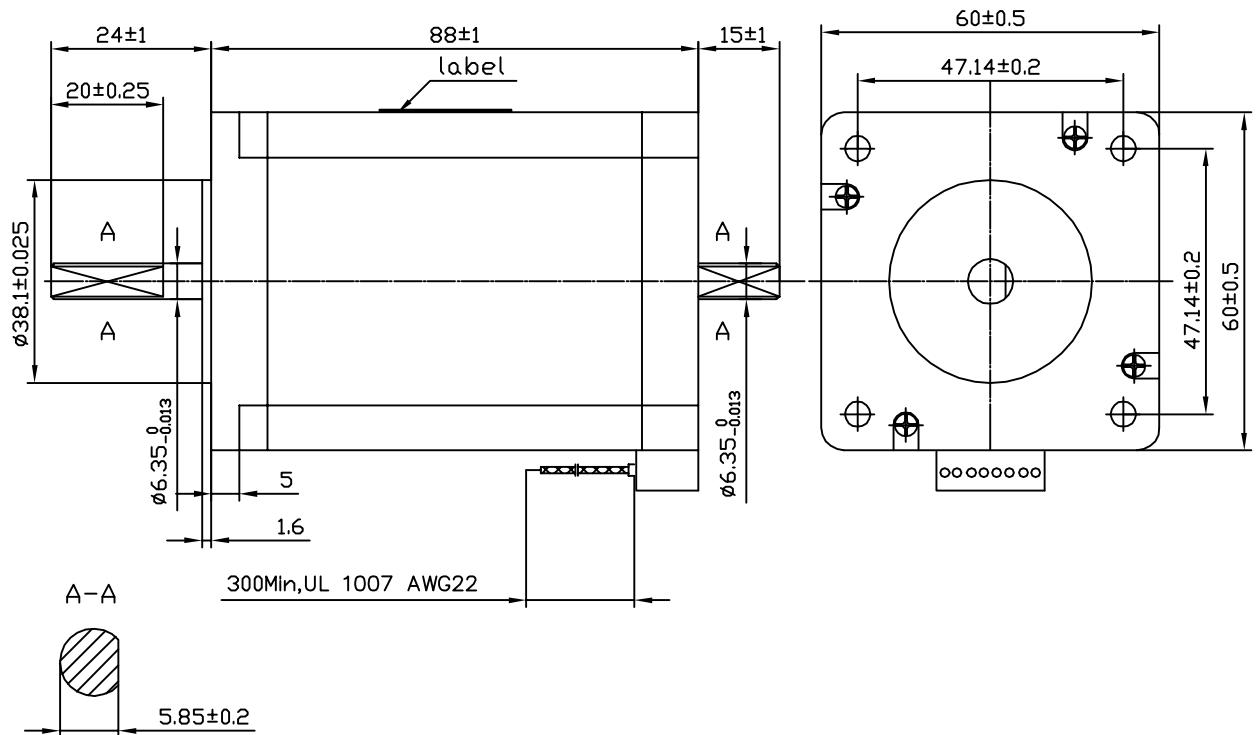

DESIGN	DATE	P/N.
CHECK		TITLE: SPECIFICATION
APPD		USED ON: KL60TH86-20-08B
SCALE	SHEET OF	DWG NO. REV
THIRD ANGLE PROJECTION		KelingTechnology, Inc

UNLESS OTHERWISE SPECIFIED TOLERANCES:  
 DECIMALS: .x ±0.5  
 .xx ±0.25  
 .xxx ±0.1  
 UNIT: mm  
 DO NOT SCALE DRAWING

REVISIONS:  
 ECN NO. DESCRIPTION  
 DRN APP'D DATE

